

LKF series


Features

- ◆ 5mm Height , Low leakage current , 1000 hours at 105°C.
- ◆ Suitable for use in high stable circuits.
- ◆ RoHS Compliant .

Specifications

Item	Performance Characteristics														
Temperature Range	-40~+105°C														
Rated Voltage Range	4~50Vdc														
Capacitance Range	0.1~100μF														
Capacitance Tolerance	±20% (120Hz, +20°C)														
Leakage Current (+20°C,max.)	I≤0.002CV or 0.4 (μA) After 2 minutes, whichever is greater measured with rated working voltage applied														
Dissipation Factor (tgδ) 120Hz, +20°C	Working Voltage(Vdc)	4	6.3	10	16	25	35	50							
	D.F(%)max.	35	24	20	16	14	12	10							
Low Temperature Characteristics (120Hz) Impedance ratio max.	Working Voltage(Vdc)	4	6.3	10	16	25	35	50							
	Z - 25°C / Z+20 °C	7	4	3	2	2	2	2							
	Z - 40°C / Z+20 °C	15	10	8	6	4	3	3							
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C														
	Capacitance Change	≤±20% of the initial value.(4V:within ±30%)													
	D.F. (tgδ)	≤200% of the initial specified value													
	Leakage Current	≤The initial specified value													
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the load life characteristics listed above.														
Others	JISC-5101(IEC 60384)														

Diagram of Dimensions

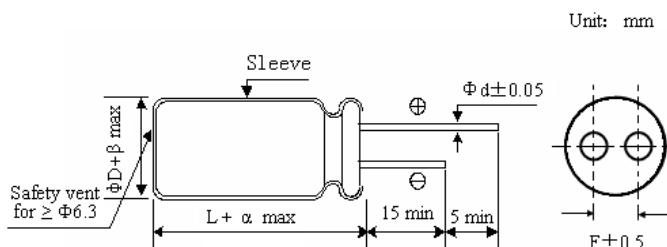

Frequency Multipliers

μF	Hz	50	120	300	1K	10K~
<68	0.75	1.00	1.35	1.57	2.00	
68~100	0.80	1.00	1.23	1.34	1.50	
ΦD	4	5	6.3			
L	5	5	5			
F	1.5	2.0	2.5			
Φd	0.45	0.45	0.45			
α		1.0				
β		0.5				

Standard Ratings

wv (V)	Cap (μF)	Case Size	Ripple Current	wv (V)	Cap (μF)	Case Size	Ripple Current	wv (V)	Cap (μF)	Case Size	Ripple Current	wv (V)	Cap (μF)	Case Size	Ripple Current
4	33	5×5	28	10	22	5×5	33	25	4.7	4×5	16	50	0.1	4×5	1.0
	47	5×5	33		33	5×5	41		10	5×5	27		0.22	4×5	2.0
	100	6.3×5	56		47	6.3×5	52		22	6.3×5	42		0.47	4×5	4.0
6.3	22	4×5	28	16	10	4×5	23	35	33	6.3×5	52	50	1	4×5	8.4
	33	5×5	37		22	5×5	37		4.7	4×5	18		2.2	4×5	13
	47	5×5	45		33	6.3×5	49		10	5×5	29		4.7	5×5	20
	100	6.3×5	70		47	6.3×5	58		22	6.3×5	46		10	6.3×5	33

Max Allowable Ripple Current (mA,rms) at 105°C 120Hz,Case Size ΦD×L(mm).

Above size is the standard size for our product. If you need special size please contact our sales offices.