

EP Series

Features


- ◆ Snap-in Terminal Type , 2000 hours at 85°C .
- ◆ Height 20mm . Miniaturized.
- ◆ Voltage range of 160~400V .
- ◆ RoHS Compliant .



Specifications

Item	Performance Characteristics											
Temperature Range	-25~+85°C											
Rated Voltage Range	160~400Vdc											
Capacitance Range	56~680μF											
Capacitance Tolerance	±20% (120Hz, +20°C)											
Leakage Current (+20°C,max.)	$I \leq 3\sqrt{CV}$ (μA) (After 5 minute application of rated voltage at +20°C)											
Dissipation Factor(tgδ) 120Hz, +20°C	<table border="1"> <tr> <td>Working Voltage(Vdc)</td> <td colspan="3">160~400</td> </tr> <tr> <td>D.F(%)max.</td> <td colspan="3">15</td> </tr> </table>				Working Voltage(Vdc)	160~400			D.F(%)max.	15		
Working Voltage(Vdc)	160~400											
D.F(%)max.	15											
Low Temperature Characteristics(120Hz)	Impedance ratio max. <table border="1"> <tr> <td>Working Voltage(Vdc)</td> <td>160~250</td> <td>315~400</td> </tr> <tr> <td>Z-25°C/ Z+20°C</td> <td>3</td> <td>8</td> </tr> </table>				Working Voltage(Vdc)	160~250	315~400	Z-25°C/ Z+20°C	3	8		
Working Voltage(Vdc)	160~250	315~400										
Z-25°C/ Z+20°C	3	8										
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 85°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>No more than 200% of the specification value</td> </tr> <tr> <td>Leakage Current</td> <td>No more than the specification value</td> </tr> </table>				Capacitance Change	Within ±20% of the initial value	Dissipation Factor	No more than 200% of the specification value	Leakage Current	No more than the specification value		
Capacitance Change	Within ±20% of the initial value											
Dissipation Factor	No more than 200% of the specification value											
Leakage Current	No more than the specification value											
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours, the characters shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>No more than 200% of the specification value</td> </tr> <tr> <td>Leakage Current</td> <td>No more than 200% of the specification value</td> </tr> </table>				Capacitance Change	Within ±20% of the initial value	Dissipation Factor	No more than 200% of the specification value	Leakage Current	No more than 200% of the specification value		
Capacitance Change	Within ±20% of the initial value											
Dissipation Factor	No more than 200% of the specification value											
Leakage Current	No more than 200% of the specification value											
Others	JISC-5101(IEC 60384)											

Dimensions

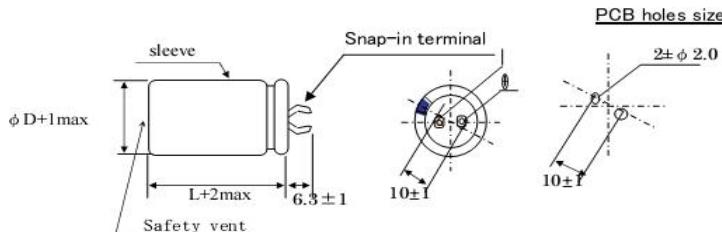

Frequency coefficient

WV(V) \ Freq(Hz)	50 (60)	120	1K	10~50K
160~250	0.80	1.00	1.15	1.47
315~400	0.80	1.00	1.15	1.47

EP Series**Case size & Maximum permissible ripple current**

Voltage	160V		200V		250V	
Cap(µF)	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	Ripple Current
82						
100						
120					22×20	0.63
150					25.4×20	0.77
180			22×20	0.77	25.4×20	0.84
220	22×20	0.85	25.4×20	0.92	30×20	1.03
270	25.4×20	1.02	25.4×20	1.03	30×20	1.14
330	25.4×20	1.13	30×20	1.26	35×20	1.39
390	30×20	1.37	30×20	1.38		
470	30×20	1.50	35×20	1.67		
560	35×20	1.70				
680	35×20	1.87				

Voltage	315V		350V		400V	
Cap(µF)	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	Ripple Current
56					22×20	0.40
68			22×20	0.45	25.4×20	0.48
82	22×20	0.49	25.4×20	0.54	25.4×20	0.55
100	25.4×20	0.59	25.4×20	0.62	30×20	0.65
120	25.4×20	0.65	30×20	0.72	30×20	0.74
150	30×20	0.80	35×20	0.85	35×20	0.88
180	30×20	0.85	35×20	0.93		
220	35×20	0.90				
270	35×20	1.12				

Size ΦD×L (mm), Ripple Current (A, rms. /85°C 120Hz) .

Above size is the standard size for our product. If you need special size please contact our sales offices .